



### Applications


Ideal for use as a replacement in most ceramic or plastic exposed cisterns.

### Water Saving


- ~ 6/4 litre dual flush
- ~ Water Technology List registered.

### Features

- ~ Available with standard 2" BSP (60mm) or 1½" BSP (48mm) outlet connection
- ~ Chrome plated dual flush push button sits neatly within cistern lid
- ~ ¼ turn bayonet fitting enables valve body to be quickly and easily removed from the cistern
- ~ Valve servicing in less than 5 minutes without disconnecting water supply or dismantling cistern
- ~ Long life silicon rubber seal
- ~ WRAS approved.

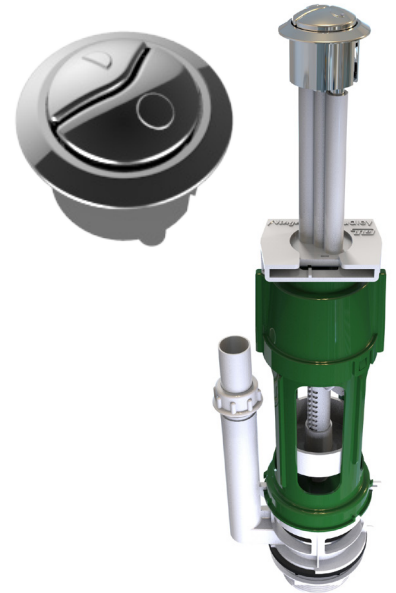

### Dimensional Data

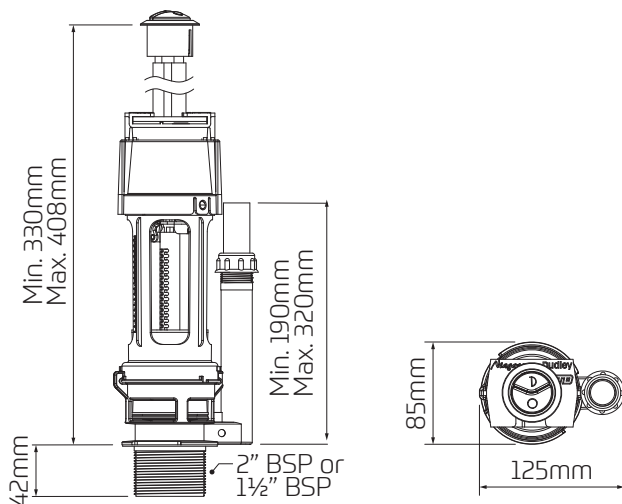

### Technical Data

Outlet	2" BSP (60mm) or 1½" BSP (48mm)
Flush Volume	6/4 Litre Dual Flush
Compatible Cistern Size	330mm to 408mm internal height
Cistern Type	Low Level Exposed, Close Coupled